IPS2 24V, Startindikering och utlösning via slutande kontakt
/Start indication and trip by closing relay

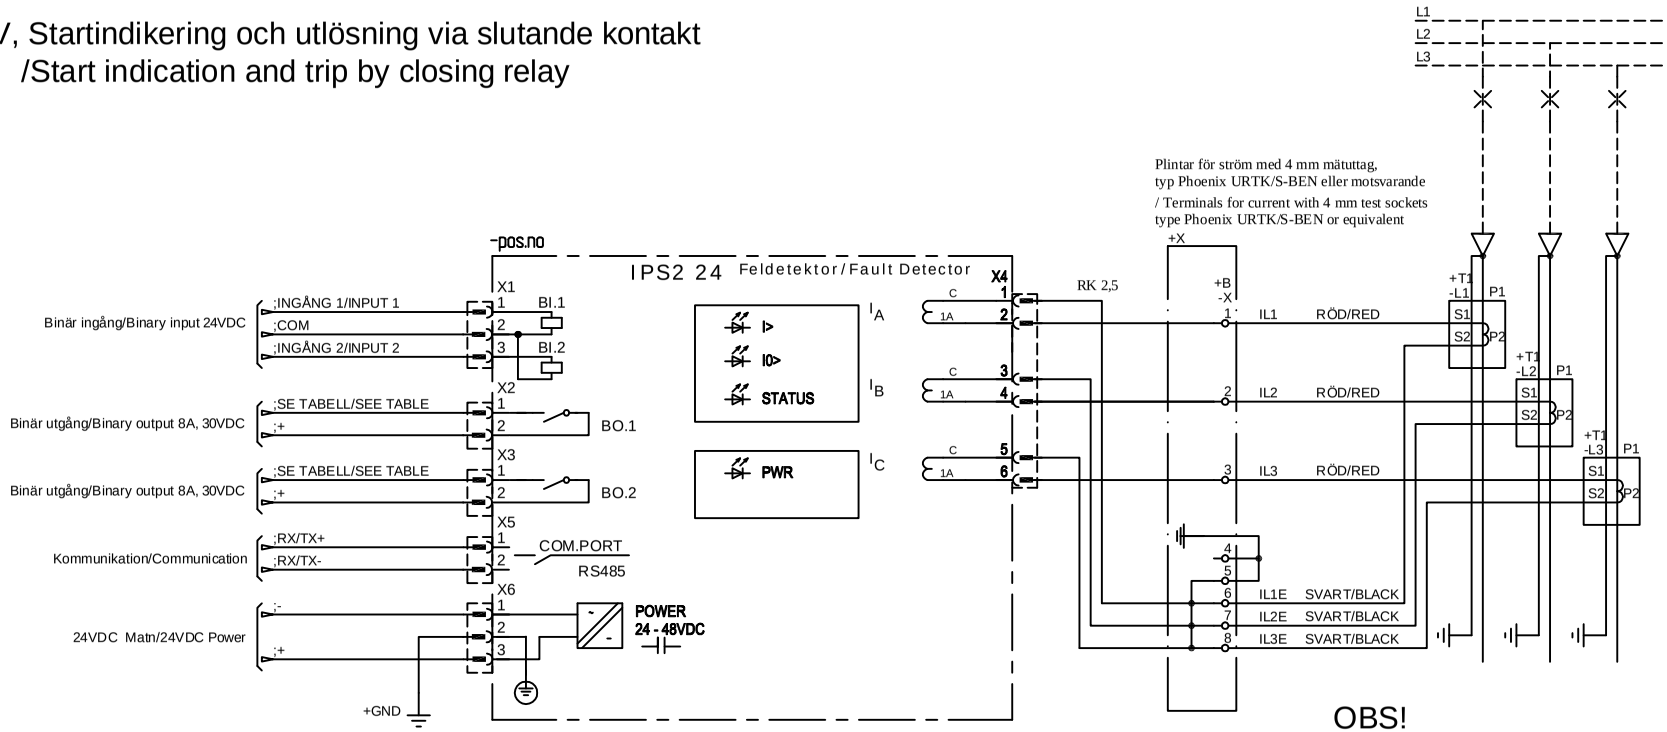

Fysiskt mått: 129 × 198(230) × 68 mm.
Montage: Två fästpunkter för montage på plåt/vägg
/Physical dimensions: 129 × 198 (230) × 68 mm.
Mounting: Two fixing points for mounting on a plate / wall

OBS!

Strömtransformatorn är inte isolerad för högspänning, därför måste skärmen gå med igenom och förbi.
Sedan skall den tillbaka igenom och jordas under strömtransformatorn så att man INTE mäter skärmströmmen

NOTE!

The current transformers are not insulated for high voltage. Thus the cable screen must pass through and pass the CT. The cable screen shall then return through the CT and be earthed, so that the screen current is NOT measured.

Binär utgång/Binary output

OPTION	BO.1 (X2)	BO.2 (X3)
0	OC/EF START	OC/EF TRIP
1	WATCHDOG	OC/EF TRIP
2	EF TRIP	OC TRIP

Rev In	Revision	Appd	Year Week

Feldetektor för överström och jordfel
Fault detector for overcurrents and earth faults
IPS2, 24 VDC 101123

Design checked by	MM
Drawing checked by	TK
Drawn by	BoA

Kretsschema/Circuit Diagram
-
Standard

Protrol

Dept	Year Week
GBG	160212

ST-2016-01 KS
101123

Rev In	Sheet
Rev In	Sheet 1
	Cont --